




CURVED MASONRY WALLS

Curved masonry walls can be accomplished in three ways, first, if the radius is large enough, by laying conventional masonry units to the radial line. The second method is by having special brick units made by the manufacturer. The third way is by cutting on an angle the head of the unit to be laid as per the drawings below. Also shown is a graph showing different sizes of masonry units and the approximate smallest radius possible (without cutting) laid up in stack bond; and, if laid up in running bond, the projection overhang. (There is no overhang in stack bond.) Do not forget the curved horizontal joint reinforcing, — it is locally available, if sufficient lead time and shop drawings of the proposed wall are provided.

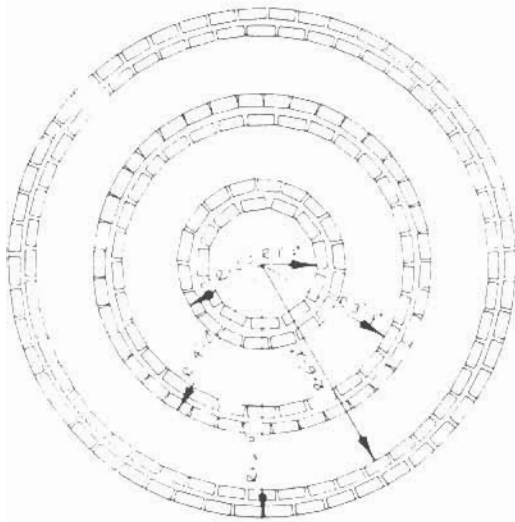

**CURVED
WALL
LAYOUTS**

NOTE: The same size units, at radius shown, will not require cutting.

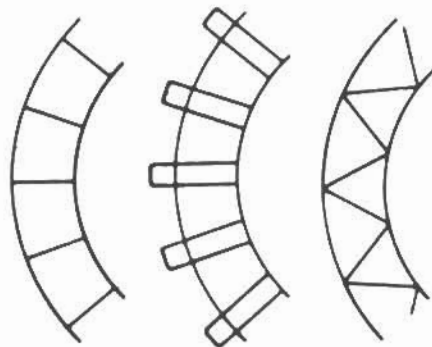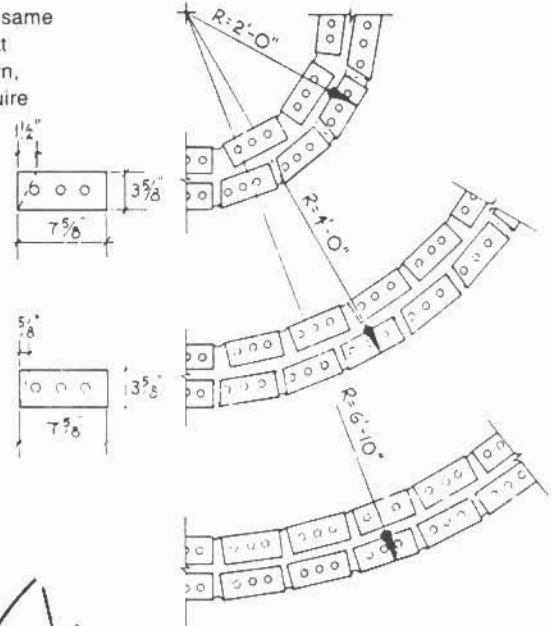

Length of Unit inches	Depth of Unit inches	= Smallest Radius (without cutting)	= Overhang* inches
2 1/4	3 5/8	2' -2"	1/32
3 5/8	3 5/8	3' -3"	1/16
7 5/8	3 5/8	6' -6"	7/64
9 5/8	3 5/8	8' -1"	1/8
11 5/8	3 5/8	9' -8"	5/32
7 5/8	7 5/8	8' -0"	3/32
15 5/8	7 5/8	15' -10"	5/32

*Overhang projection if in running bond

Masonry Institute of America
386 Beech Ave., Suite #4 • Torrance, CA 90501-6202
Tel: (310) 328-4400 – Fax: (310) 328-4320
e-mail: askus@masonryinstitute.org
www.masonryinstitute.org

